


# Product datasheet

Collated hard drywall screw extreme for  
wood stud and steel plates max 2 mm

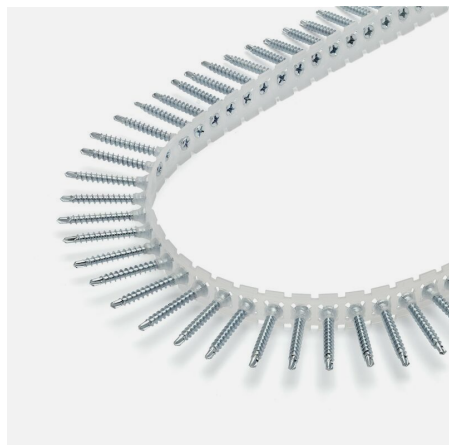

**Function:** Drill tip and threads adapted for anchoring to wood and steel up to 2 mm. The design of the head allows the screw to sink into the drywall board without any problems. Suitable for mounting extremely hard drywall board.

**Track type bit:** Philips 2.


**Material:** Case hardened steel.

**Coating:** Zinc-plated 5 my, for indoor use.

**Installation instructions:** A power screwdriver with a speed of 2,000-5,000 rpm is recommended.

**Sizing:** Around 15 pcs/m<sup>2</sup>, screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.9	26	21	RBH1026		1000	Packaging	10
3.9	35	30	RBH1035		1000	Packaging	10
3.9	55	50	RBH1055		1000	Packaging	8



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: [vsb@vsbyggskruv.se](mailto:vsb@vsbyggskruv.se)  
Website: [vsbyggskruv.se](http://vsbyggskruv.se)

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Brämhult  
Sweden

